


SAE 外螺纹带 O 形圈轻系列 ISO 11926-3/

美制 NPSM 内螺纹 60° 外锥

SAE O-RING BOSS L-SERIES ISO 11926-3/NPSM FEMALE 60° CONE

20U

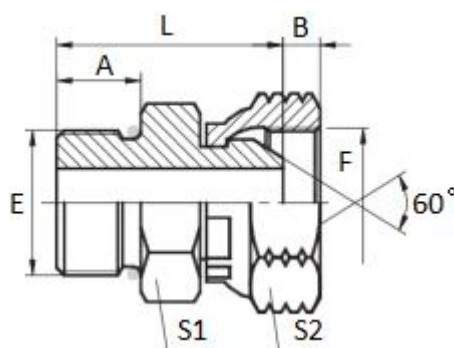

代号尺寸:

代 号 PART NO.	螺 纹 THREAD		O 形圈 E 端 O-RING E 端	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
20U-04Z	7/16"X20	1/4"X18	O904	9.1	4.6	26	14	19
20U-04-06Z	7/16"X20	3/8"X18	O904	9.1	6	27.5	17	22
20U-06Z	9/16"X18	3/8"X18	O906	9.9	6	28.5	17	22
20U-06-08Z	9/16"X18	1/2"X14	O906	9.9	7.5	30	19	27
20U-08Z	3/4"X16	1/2"X14	O908	11.1	7.5	33	22	27
20U-08-06Z	3/4"X16	3/8"X18	O908	11.1	6	31	22	22
20U-10-08Z	7/8"X14	1/2"X14	O910	12.7	7.5	36.5	27	27
20U-12-08Z	1.1/16"X12	1/2"X14	O912	15.1	7.5	40	32	27
20U-12Z	1.1/16"X12	3/4"X14	O912	15.1	8.9	41	32	32
20U-12-16Z	1.1/16"X12	1"X11.5	O912	15.1	10.5	42.5	32	41
20U-16Z	1.5/16"X12	1"X11.5	O916	15.1	10.5	42.5	38	41
20U-20Z	1.5/8"X12	1.1/4"X11.5	O920	15.1	11.2	50	50	50
20U-24Z	1.7/8"X12	1.1/2"X11.5	O924	15.1	11.2	50	55	55

注: E 螺纹端与 ISO 11926-1 油口匹配使用。 Note: E thread end fit with ISO11926-1 port.